

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
20 January 2005 (20.01.2005)


PCT

(10) International Publication Number
WO 2005/004593 A1

- (51) International Patent Classification⁷: A01K 73/02 (74) Agent: LANGFELDT, Jens, F., C.; Zacco Norway AS, P.O. Box 765, Sentrum, N-0106 Oslo (NO).
- (21) International Application Number: PCT/NO2004/000215 (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (22) International Filing Date: 13 July 2004 (13.07.2004)
- (25) Filing Language: Norwegian
- (26) Publication Language: English
- (30) Priority Data: 20033198 15 July 2003 (15.07.2003) NO
- (71) Applicant (for all designated States except US): NORWAY SEAFOODS AS [NO/NO]; Fjordalléen 16, N-0250 Oslo (NO).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): ERNSTEN, Robert [NO/CR]; Kilometro Cinco, Golfito (CR). ARSKOG, Roar [NO/NO]; Nordre Vartdal, Vartdal, N-6150 Ørsta (NO). KJÆRSTAD, Jan, H. [NO/NO]; N-6280 Sjøvik (NO). NAKKEN, Børge [NO/NO]; N-6394 Fiksdal (NO).
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report

[Continued on next page]

(54) Title: TRAWL APPARATUS

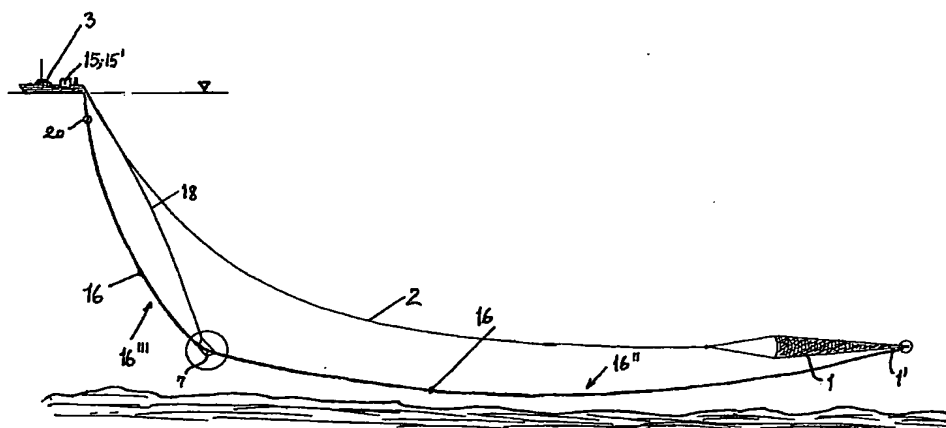

(57) Abstract: A trawl apparatus (1) equipped with a means for gathering seafood/biomass and conveying it to a seafood/biomass receiving vessel (3). The trawl (1) is equipped with an elongate, preferably rigid or flexible collecting cage (5) which at an inlet opening (5') is connected to the rear end (1') of the trawl, and from the inlet opening extends into a second portion, defined by walls (9, 9'), roof (9'') and bottom (9''') which have openings for straining water, and is terminated in a downstream portion (5''; 5'''). A conveying hose - or pipe (4; 16, 16') for conveying seafood/biomass from the collecting cage (5) up to the vessel (3) opens into the downstream or aft portion (5''; 5''') of the cage (5) via a funnel (13; 17). Air or other fluid is supplied from the vessel (3) via a supply hose (6; 19) for injection into the conveying hose - or the pipe (4; 16), in order, by injector effect, to cause suction of the seafood/biomass from the collecting cage (5) to the vessel (3). The apparatus is particularly suitable for continuous conveyance of seafood/biomass from the trawl to the vessel (3) during prolonged trawling.



— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

TRAWL APPARATUS

The present invention relates to a trawl apparatus equipped with a means for gathering seafood/biomass and conveying it to a seafood/biomass receiving vessel, as defined in
5 more detail in the preamble of attached claim 1.

During a trawling operation, a trawl is towed behind a trawl vessel using adapted lines with or without otter boards, whereby seafood/biomass such as fish, shrimp and krill and/or other seafood/biomass is gathered in a trawl bag. After this trawl bag has been
10 more or less filled with seafood/biomass, it is normally hauled on board the vessel and emptied. Alternatively, the trawl bag or sack may be emptied whilst floating alongside the vessel. Some types of seafood/biomass, such as for instance, krill, have a short lifetime after being gathered in the trawl and brought to the surface before they die and rapidly begin to decompose, their value as a raw material thus diminishing
15 considerably. In general, it is important for all forms of seafood/biomass that it should come to the vessel undamaged and as quickly as possible for further processing, as delays in this process usually substantially diminish the quality of the seafood/biomass. Seafood/biomass that is subjected to rough handling and crushing through being gathered in a trawl bag and hauled on board the vessel, whereupon the trawl bag is
20 emptied, or by mechanical pumping from the trawl bag for collection on board the vessel, will also be of reduced quality and value because of the damage it suffers. The reduction in value will also extend to by-products from seafood/biomass such as roe, liver or the like. Seafood/biomass that is caught in a traditional manner will also largely be dead the moment it comes aboard the vessel.

25

In connection with trawl bags, it is known to equip such a bag with a sorting grille or filtering grille to be able to separate out larger units of seafood/biomass and marine animals, as for instance larger fish. The apertures in the sorting or filtering grille will determine what marine animals or seafood/biomass are filtered out of the trawl bag.
30 There are also prior art solutions for separating small fish from the catch using similar systems.

It has also previously been suggested to use different forms of mechanical pump solutions with an inlet opening in the end of the trawl bag so as to be able to pump the
35 filtered content of the trawl bag directly up to a vessel on the surface, but the known solutions have not been particularly successful because of compression at the end of the trawl bag and frequent blockages.

For further illustration of the prior art reference is made to the teachings of US Patents 1447553 and 3440752 and Norwegian Patents 109811, 35544, 166512 and 313261.

5 Accordingly, there is a substantial need to be able to enhance the efficiency with which undamaged and living seafood/biomass gathered by the trawl is conveyed to a seafood/biomass receiving vessel. The invention is of particular importance for the gathering and conveyance of krill, shrimp and other types of seafood/biomass, including all forms of fish, where conveyance to a production vessel for further processing and
10 continuous, non-stop preservation on board can take place in controlled forms during continuous or prolonged trawling

The apparatus mentioned in the introduction is characterised by the features set forth in the characterising clause of attached claim 1.

15

The apparatus is characterised in that it can advantageously be used during uninterrupted, continuous or prolonged trawling, where seafood/biomass is also in an uninterrupted or continuous manner over a long period conveyed up to a receiving vessel.

20

Advantageous embodiments of the apparatus are disclosed in the dependent claims.

The invention will now be described with reference to the attached figures.

25 Fig. 1 is a schematic illustration of a trawling operation which makes use of a first embodiment of the apparatus according to the invention.

Figs. 2 and 3 show on an enlarged scale details of the apparatus shown in Fig. 1, according to the invention.

30

Fig. 4 shows in even further detail the collecting cage that is an integral part of the apparatus shown in Figs. 1 and 3, according to the invention. Fig. 5 is a schematic view of a trawling operation which makes use of a second, preferred embodiment of the apparatus, according to the invention.

35

Figs. 6, 7 and 8 show on an enlarged scale details of the apparatus shown in Fig. 5, according to the invention.

Fig. 9 shows in even further detail the collecting cage that is an integral part of the preferred apparatus shown in Figs. 5 and 8, according to the invention.

- 5 Fig. 10 shows in more detail an example of a cleaning device for mounting in the collecting cage.

In Fig. 1 the reference numeral 1 indicates a trawl which with the aid of towing lines 2 with or without otter boards or other devices for spreading the trawl opening (not shown) is towed behind a trawl vessel 3. A conveying hose 4 extends from the trawl vessel 3 down towards the trawl and at its end is connected to a collecting cage 5, where the inlet end 5' of the cage 5 is connected to the rear end 1' of the trawl 1. In addition, from the vessel 3 there is provided a supply hose 6 which extends downwards and either is connected to the conveying hose 4 at a random point 4' on the hose 4 between the trawl and the vessel, preferably connected as shown in Fig. 2. Alternatively, the connection can be made at a point 4" close to the rear end 4''' of the conveying hose 4, as shown in Fig. 4, and the supply hose can then be run as indicated by the reference numeral 6' in Fig. 1. It is intended to pass a fluid, for example air or seawater, through the supply hose 6, which, by injector effect on introduction into the conveying hose 4 in the direction of the vessel 3, will cause suction of seafood/biomass via the collecting cage 5 and conveying hose 4 up to the vessel. Alternatively, the movement of fluid may be take place using the fluid displacement principle. In Fig. 1, the supply hose 6 is shown in part in a broken line to illustrate the case where it is connected at the point 4" as shown in Fig. 4. The supply hose 6 can also be uncoupled between the vessel 3 and the connection point 4". The principle of handling and arrangement of the hoses and line can be varied.

As indicated in Fig. 2 on an enlarged scale, a weight 7 may advantageously be attached to the conveying hose to ensure that this is held in position behind the vessel 3. This naturally applies also to the supply hose 6. Adjustment of the position of the weight relative to the height of the collecting cage can be done automatically using wireless sensors and computer-controlled winches.

The collecting cage 5 which is preferably arranged at the open end 1' of the trawl, is, as shown in Fig. 4, made in the form of an elongate body with an open front end 5' and a rear end 5" which passes into a funnel 8. The collecting cage 5 is made having walls 9, 9' and roof 9" and bottom 9'''. These walls, roof and bottom may be made in the form of

a grille or of a wire netting material or the like, the openings thus provided being suitable for straining water. The walls and roof and bottom may be modularly constructed of sections, as indicated by the reference numeral 10, and joined in an appropriate manner. The sections 10 may advantageously have a circular or polygonal cross-section. In Figs. 4 and 9 the collecting cage is shown, by way of example, having a square cross-section. Mounted on the collecting cage may be a movable or mechanical cleaning device 21, indicated in Fig. 9 and shown in the form of an example in Fig. 10.

At the open front end of the collecting cage 5, indicated by the reference numeral 5', there is, if desired/required, a cage section without a roof, as indicated by the reference numeral 11, so that the collecting cage 5 in that section is open at the top so as to be able to cooperate with a screen or grille 12 that extends from the bottom edge of the opening 5' inwards and upwards in the collecting cage 5. The purpose of the grille is to ensure that seafood/biomass, for example, fish, or foreign objects over a certain size do not pass through the grille, but are led up through the opening 11 and away from the collecting cage 5. It may also be an environmental requirement that fish which are not to be caught by the trawl should be automatically sorted away from the trawl. The grille can guide foreign objects through the opening in the roof of the cage as described above, or alternatively through the sides or bottom of the cage. In a simplified version, it is conceivable that the grille could be rotated 90° or 180° relative to that shown in Figs. 4 and 9 in order to make this possible. If the channelling away of foreign objects is intended to take place, for example, via two side walls, the grille could have a V-shape.

Suitable dimensioning of the apertures that will be found in the grille 12 will allow the grille to be adapted to sort away all objects that are larger than the desired seafood/biomass, for example, krill, shrimp, fish or the like. As shown in Fig. 4, the said funnel 8 passes into a duct portion 13 that is suitably bent so that the duct 13 opening 13' is preferably arranged parallel to the longitudinal direction of the collecting cage 5. The duct 13 is connected to the conveying hose 4 at its end 4". The conveying hose 4 is, as indicated above, run up to the vessel 3, and the seafood/biomass that is conveyed to the vessel 3 can be collected on board and further treated or further processed, and preserved. On board the vessel, the conveying hose and the supply hose could be coiled on hose drums with centre runout and swivels to enable the hose length to be easily adjusted whilst the conveyance of seafood/ biomass up to the vessel continues. After or during the conveyance of the seafood/ biomass to the vessel 3, it must be separated from the seawater that accompanies it on its way up. This can be effected, if necessary, by

means of a deceleration device which reduces the conveying rate and a suitable screening box for seawater schematically indicated by the reference numeral 15. The fact that the trawl in this way can be emptied continuously whilst it is towed through the water is essential for the quality that the caught seafood/biomass will have, and will consequently also affect the quality of the finished product.

As the seafood/biomass can be conveyed continuously, undamaged and alive up to the vessel, it will also be possible to remove immediately any unwanted seafood/biomass on board and subsequently return it to the ocean in an undamaged and living form. The fisherman also has good control of what he catches and avoids catching large quantities of unwanted seafood/biomass in the trawl bag.

Guide fins 14, 14' which run in the longitudinal direction of the collecting cage 5 are preferably, but not necessarily, arranged on the outside of the collecting cage 5.

The amount of air or other fluid that is to be admitted into the conveying hose 4 by means of suitable devices on the vessel is optimised to facilitate the most efficient continuous emptying of the collecting cage 5 in order to provide optimum conveying conditions for the seafood/biomass that is to be gathered and conveyed up to the vessel.

A slightly more preferred embodiment of the invention, and which represents a modification of the embodiment that is shown and described in connection with Figs. 1-4, will now be described in more detail with reference to Figs. 5-9, and the main focus will be on the structural changes compared with the embodiment shown in Figs. 1-4. Elements in Figs. 5-9 which have the same design or the same function as that shown in the embodiment in Figs. 1-4 have been given the same reference numerals, and will not be described in more detail below.

Figs. 5-9 show a conveying hose 16 for conveying seafood/biomass gathered in the collecting cage 5 via the trawl 1 up to the trawler vessel 3. From Figs. 5 and 8, it can be seen that the hose 16 in a preferred embodiment runs along the underside of the trawl 1. Then, as shown in Figs. 8 and 9, the hose runs into the collecting cage 5 and preferably along the bottom 9" thereof in the form of a conveying pipe 16' which at a rear section 5" of the collecting cage passes into a guiding funnel 17. The funnel opening will advantageously face the back wall 9" of the collecting cage. As shown in Fig. 7, a weight 7 will be provided on the conveying hose 16 in order to hold it down, just as in the embodiment in Figs. 1 and 2, and the position of the weight may advantageously be

in an area where the conveying hose 16 goes from a portion 16" which is in the trawling direction to an upward extending portion 16"". The weight 7 is connected to the vessel 3 via a connecting line 18, corresponding to that shown in Figs. 1 and 2.

5 Unlike the solution shown in Figs, 1, 3 and 4 where a fluid, preferably air, is supplied via the supply hose 6 either at a point 4" on the conveying hose 4 or at a point 4' on the conveying hose 4 at the position of the weight 7, in the solution illustrated in Fig. 5 a supply hose 19 supplies air or other fluid under pressure to an injector 20 which is connected to the conveying hose 16 at a point which is at a depth that is substantially
10 smaller than the depth at which the trawl 1 and the collecting cage 5 are located. Thus, it is seen that the injector 20 is located in a upper part of the upward extending portion 16"" of the hose 16. The injector 20 causes substantial suction to be produced in the conveying hose, almost causing a siphon effect in order to draw up seafood/biomass from the collecting cage 5 via the funnel 17, conveying pipe 16' and the hose 16 to the
15 vessel 3 via the injector 20. A considerable advantage of placing the injector 20 substantially closer to the vessel 1 than shown in Fig. 1, is that the conveying path for air or other fluid to the injector is shorter, which makes smaller demands as regards the fluid pressure that will be required in the supply hose 19 in order to bring the seafood/biomass up to the vessel, and thus reduces the power requirement needed for
20 the supply of air or other fluid to the injector. It is also a great advantage in connection with, e.g., inspection, maintenance or the like of the injector 20 that it is not too far beneath the surface of the sea. Adjustment of the level at which the injector is positioned relative to the collecting cage can be done automatically using wireless sensors and computer-controlled winches.

25

Fig. 10 is a purely schematic illustration of the principle of a possible cage cleaning device 21 consisting of a rotating bladed wheel 22 where the blades 22', when they rotate about an axis of rotation 23 and are under a semi-circular cover 24, will be horizontal or almost parallel to the adjacent wall, bottom or roof of the collecting cage
30 to reduce water resistance, whilst when the blades 22' move outside the front edge 24' of the cover, they will turn to stand almost perpendicular to the adjacent wall, bottom or roof of the cage.

As mentioned in the introduction, the gathering and conveyance of, for instance, krill
35 and other biomass will be critical as regards time, as, the quality of, for example, krill that is to be further treated and processed may easily deteriorate because it dies too long before the processing takes place. Swift conveyance of living individuals up to the

vessel and thence directly to a continuous processing process has the effect of ensuring that the protein content and the quality of the gathered seafood/biomass is optimal and considerably better than what can be achieved with the known solutions. As also mentioned in the introduction, the quality of the seafood/biomass such as krill or fish
5 that is first subjected to crushing during the gathering in the trawl bag and is then subjected to further crushing and damage when the trawl is hauled on board the vessel and emptied, or if the trawl is emptied by mechanical pumping, will also be enhanced by using the apparatus described, as the seafood/biomass is subjected to far less rough handling/damage during collection and conveyance to the vessel, and moreover it
10 reaches the vessel whilst still alive.

Although the present invention will be especially suitable for the collection and conveyance of, for example, krill, it will be obvious that the apparatus can also be used for any form of seafood/biomass that has larger or smaller individual dimensions or
15 form. Thus, it should be clear that the invention is not limited to use at sea, but can just as readily be used in fresh water or inland waters or lakes.

The design of the collecting cage 5 shown in the figures is of course not a limitation as regards how the collecting cage may be designed and equipped, or of what suitable
20 materials it is made. There may, for example, be provided devices known per se in the form of sensors, which, for instance, may be wireless, for monitoring the position of the collecting cage in the water, depth, flow etc.

Although the use of filtering grille 12 has been illustrated and described, it may in some
25 circumstances be neither necessary nor desirable.

P a t e n t c l a i m s

1.

A trawl apparatus (1) equipped with a means for gathering seafood/biomass and
5 conveying it to a seafood/biomass receiving vessel (3),
characterised in

- that the trawl (1) is equipped with an elongate, preferably rigid or flexible
collecting cage (5) which at an inlet opening (5') is connected to the rear end (1')
of the trawl, and from the inlet opening extends into a second portion, defined by
10 walls (9, 9'), roof (9'') and bottom (9''') which have openings for straining water,
and is terminated in a downstream portion (5"; 5''');
- that a conveying hose – or pipe (4; 16, 16') for conveying seafood/biomass from
the collecting cage (5) to the vessel (3) opens into the downstream or aft
portion (5"; 5''') of the cage (5) via a funnel (13; 17); and
15 - that air or other fluid is supplied from the vessel (3) via a supply hose (6; 19)
for injection into the conveying hose – or the pipe (4; 16), in order, by injector
effect or fluid displacement technique, to cause suction of the seafood/biomass
from the collecting cage (5) up to the vessel (3).

20 2.

An apparatus as disclosed in claim 1, characterised in

- that a sorting or filtering grille (12) is provided at the inlet opening (5') of the
collecting cage (5) and is arranged to extend obliquely inwards and upwards,
downwards and/or sideways in the collecting cage (5); and
25 - that a portion (11) of the roof, bottom and/or walls of the collecting cage (5)
located at a downstream end of the grille (12) is open, so that seafood/biomass,
for example, fish, or foreign objects over a certain size do not pass through the
grille (12) but are led through the at least one open portion (11) and away from
the collecting cage (5).

30

3.

An apparatus as disclosed in claim 1 or 2, characterised in

- that the apertures in said walls, roof and bottom for straining water are formed of
a self-cleaning grating or grille structure which may be rigid or flexible.

35

4.

An apparatus as disclosed in claim 1 or 2, characterised in

- that at least one wall, roof or bottom portion of the collecting cage is equipped with a mechanical device for effecting the cleaning of the grating or grille structure.
- 5 5.
- An apparatus as disclosed in claim 1, 2, 3 or 4, characterised in
- that the collecting cage (5) is modularly constructed of joined sections (10).
- 6.
- 10 An apparatus as disclosed in one or more of claims 1-5, characterised in
- that the funnel is inside the cage (5), the mouth of the funnel (17) facing and spaced from an aft wall (9''') of the cage (5).
- 15 7.
- An apparatus as disclosed in one or more of claims 1-6, characterised in
- that the supply of air or other fluid is, via the air supply hose (6), adapted to be injected at a point on the conveying hose or pipe (4) close to an area where the
- 20 conveying hose or pipe (4) forms a marked upward gradient towards the surface of the sea.
- 8.
- An apparatus as disclosed in one or more of claims 1-6,
- 25 characterised in
- that the supply of air or other fluid is, via the supply hose (19), adapted to be injected via a, preferably depth-adjustable, injector (20) that is connected at a point on the conveying hose or pipe (16) in an upper area of the portion of the conveying hose or pipe (16) which has a marked upward gradient towards the
- 30 surface of the sea.
- 9.
- An apparatus as disclosed in one or more of claims 1-8, characterised in
- 35 - that in connection with, after or during the conveyance of the seafood/biomass from the collecting cage (5) to the vessel (3), there is provided a straining device (15') to separate seafood/biomass from seawater which accompanies it during

10

its conveyance from the collecting cage (5) to the vessel (3).

10.

An apparatus as disclosed in claim 9,

5 characterised in


- that in connection with the straining device there is provided a deceleration device (15) which is designed to reduce the conveying rate of conveyed seafood/biomass.

10 11.


An apparatus according to any one of claims 1-10,


characterised in

- that sensors (21) are provided on or in connection with the collecting cage (5) for monitoring the position/orientation of the collecting cage (5) in the water,
15 depth, water flow etc.

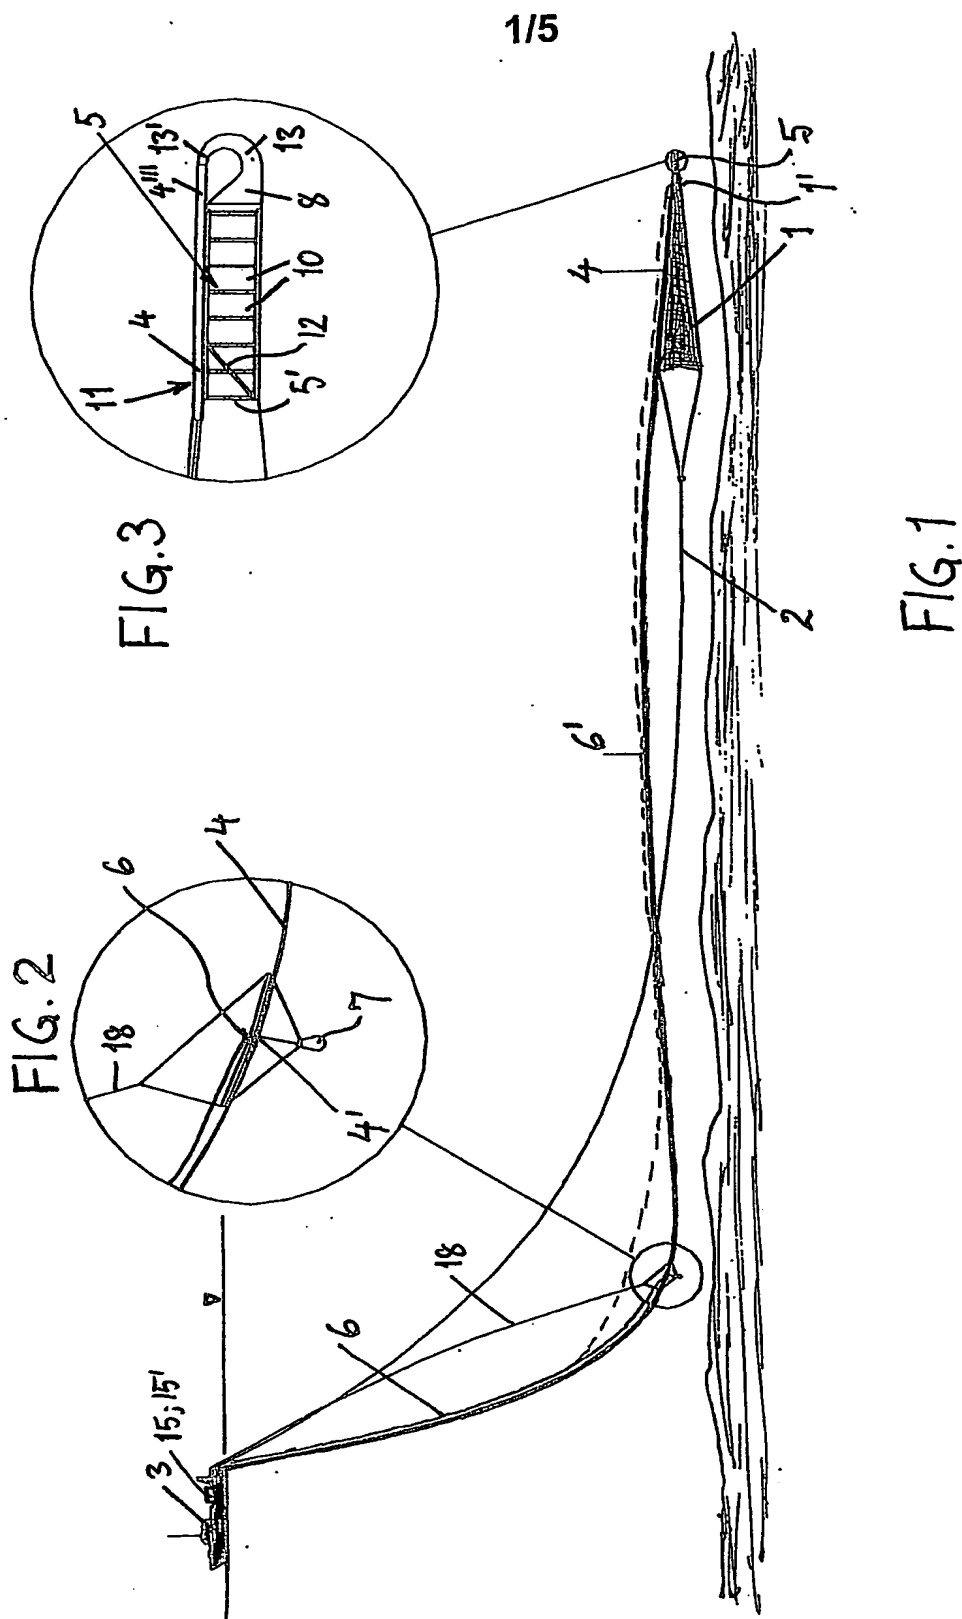


2/5

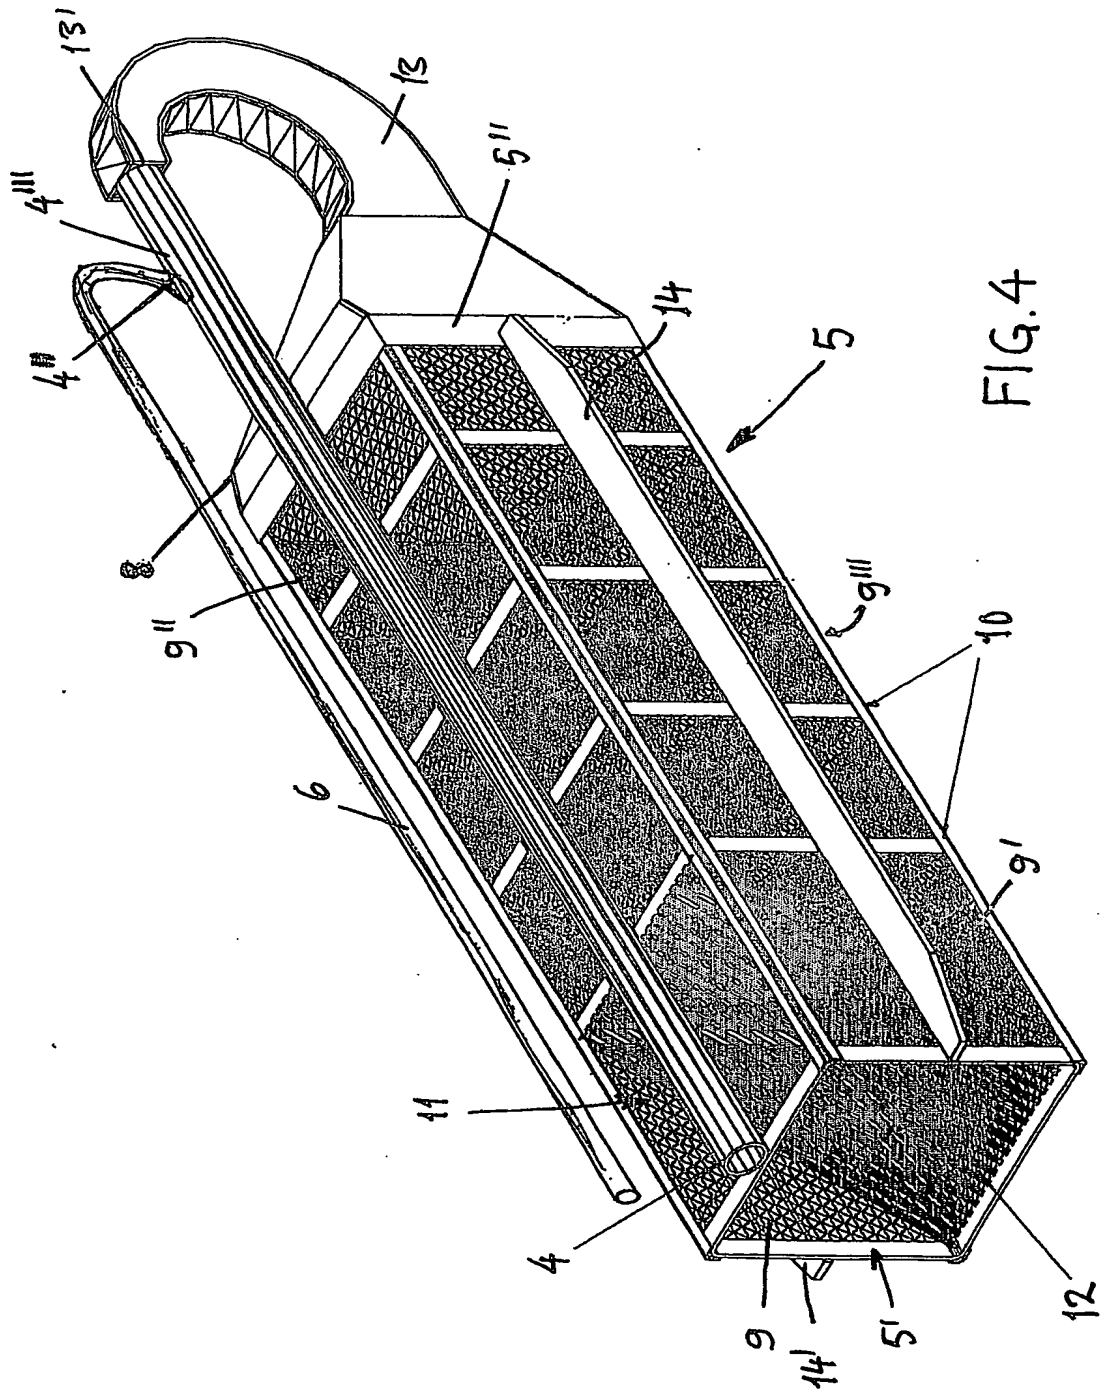

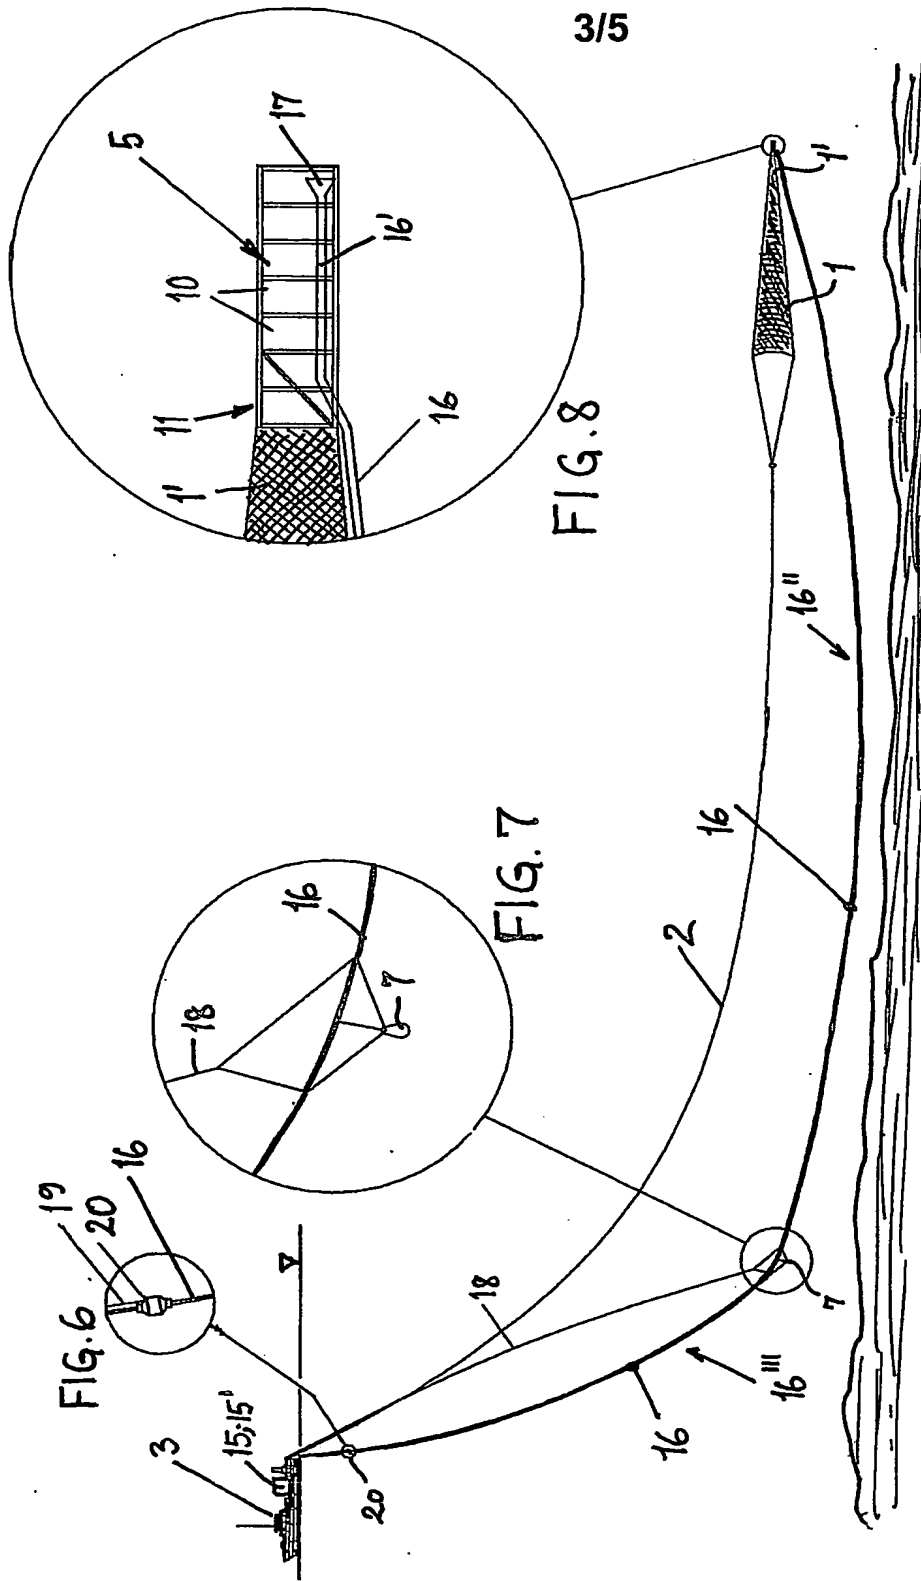

4/5

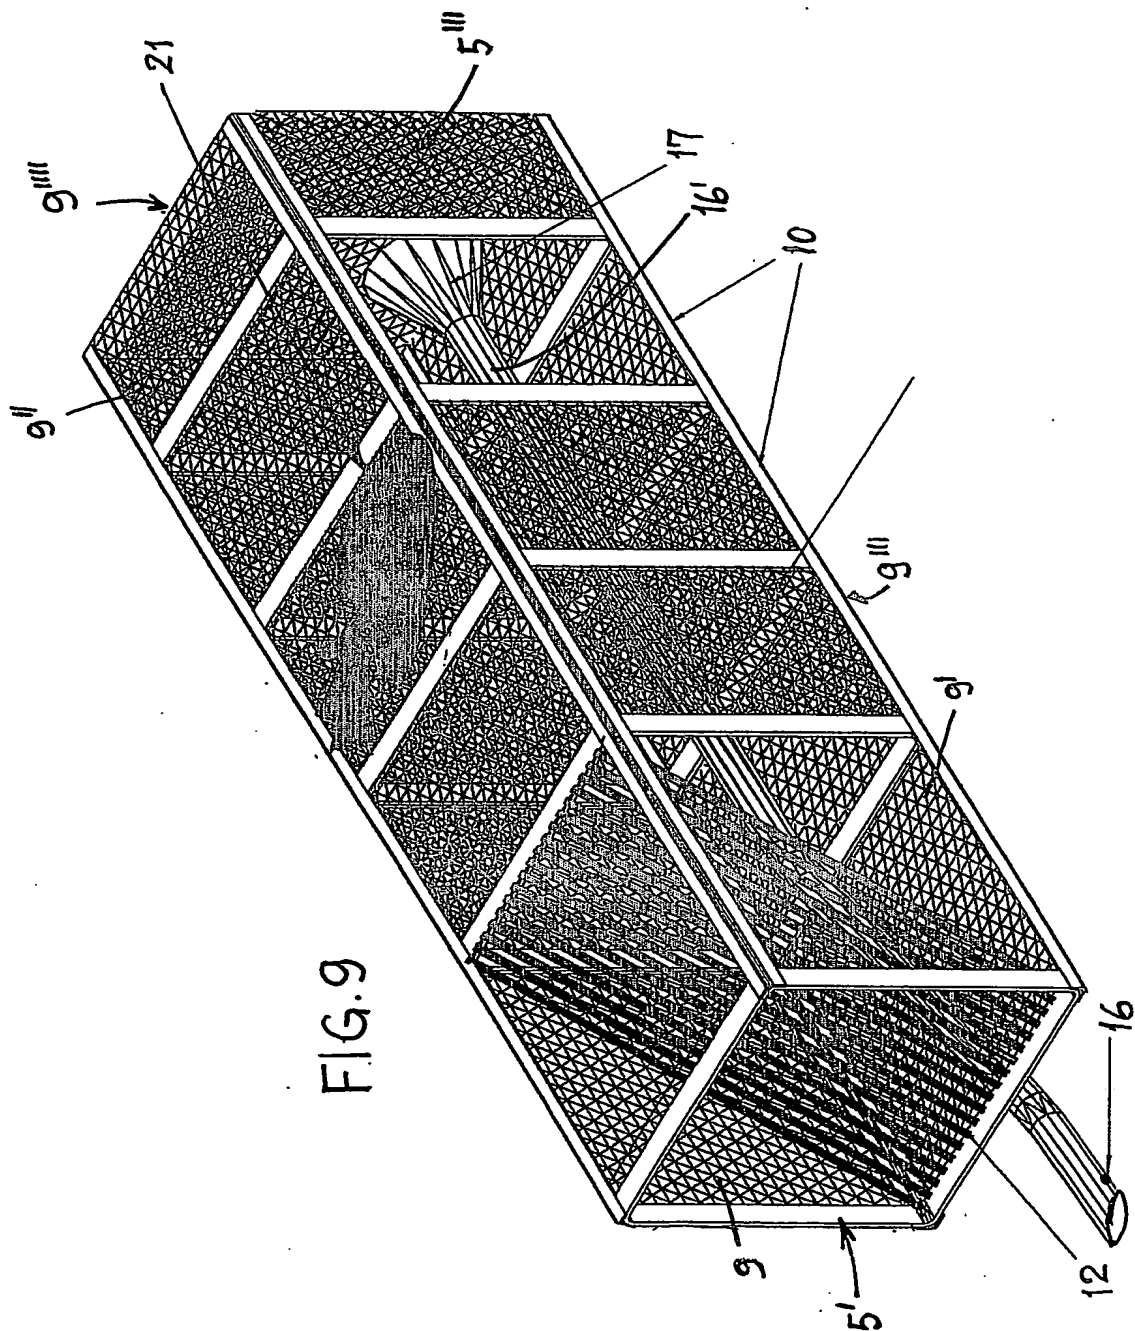

5/5

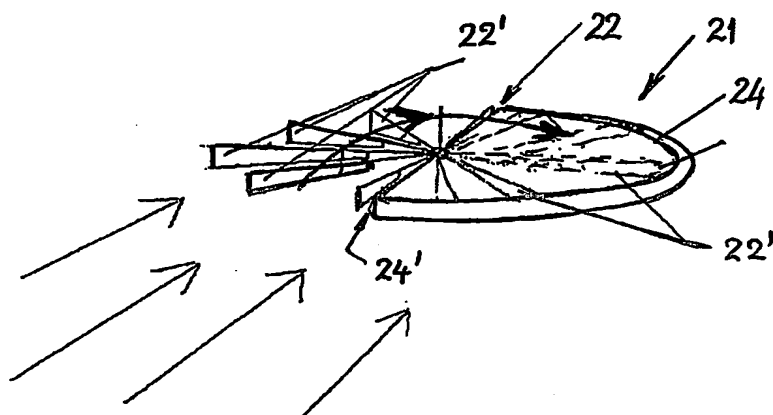


FIG. 10

INTERNATIONAL SEARCH REPORT

International application No.

PCT/NO 2004/000215

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: A01K 73/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: A01K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 1447553 A (M R HUDSON), 6 March 1923 (06.03.1923), page 1, line 71 - page 2, line 37, figure 3 --	1-5,7,9-11
A	US 1388414 A (C P DROS), 23 August 1921 (23.08.1921), page 3, line 73 - line 111, figure 9 --	1
A	DD 289919 A5 (VEB FISCHFANG ROSTOCK), 16 May 1991 (16.05.1991), figure 1, abstract --	1
A	NO 166512 B (SOLBJORN JACOBSEN), 29 April 1991 (29.04.1991), figure 2, abstract --	1

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"B" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

25 November 2004

Date of mailing of the international search report

26 -11- 2004

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Carl Fröderberg/EK

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/NO 2004/000215

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>NO 313261 B1 (SVEIN ANDERSEN ET AL), 9 Sept 2002 (09.09.2002), figure 6, abstract</p> <p style="text-align: center;">-- -----</p>	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/NO 2004/000215

US	1447553	A	06/03/1923	NONE		
US	1388414	A	23/08/1921	US	1462196	A 17/07/1923
DD	289919	A5	16/05/1991	NONE		
NO	166512	B	29/04/1991	AU	553168	B 03/07/1986
				AU	8086682	A 26/08/1982
				DE	3267214	D 00/00/0000
				DK	147061	B,C 02/04/1984
				DK	435782	A 01/10/1982
				EP	0073769	A,B 16/03/1983
				SE	0073769	T3
				JP	3056694	B 29/08/1991
				JP	58500233	T 17/02/1983
				NO	820284	A 05/08/1982
				NO	883754	A 05/08/1982
				WO	8202645	A 19/08/1982
NO	313261	B1	09/09/2002	NO	20010561	A 05/08/2002